


series

LD112

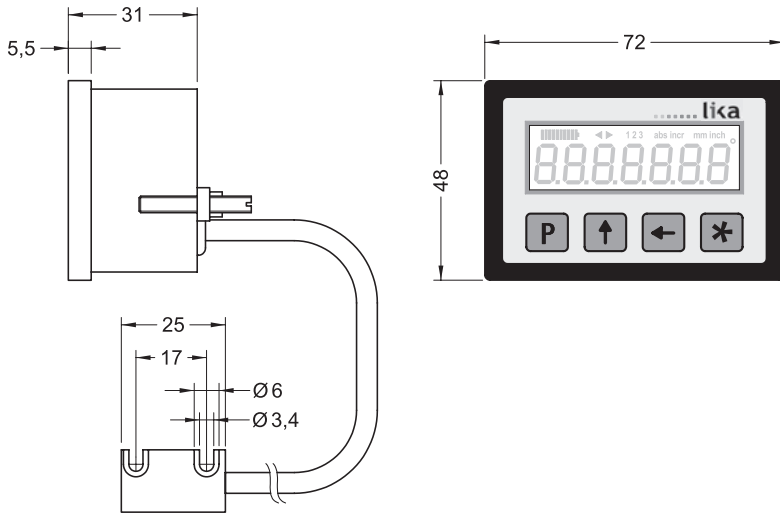

LD112

- Quasi-absolute battery powered display
- Compact housing
- Connected sensor
- Linear and angular display mode
- Resolution up to 0.01 mm

PARAMETERS

3 Offset values, preset, resolution, mm/inch, angular display mode

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range: 0°C ÷ +50°C (+32°F, +122°F)
 Storage temperature range: -20°C ÷ +80°C (-4°F, +176°F)
 Protection: IP60 front, IP40 back

MECHANICAL SPECIFICATIONS

Dimensions: 72 x 48 x 31 mm
 Cut out: 68 x 33 mm²
 Cable length: 5 m max.
 Display: LCD (-999999 ÷ 999999)


ELECTRICAL SPECIFICATIONS

Power supply: 2 batteries 1,5 V
 Consumption: ~ 220 µA
 Measurement speed: < 5 m/s max.

ACCESSORIES

MT25: Magnetic tape

ORDERING CODE

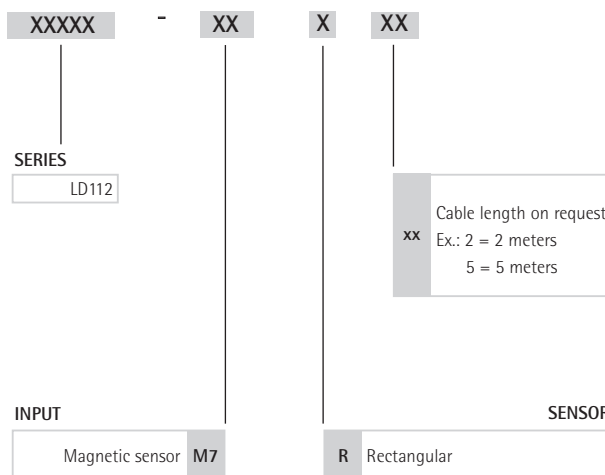

www.lika.biz
 • Data-sheet
 • Manual