


series

LD141

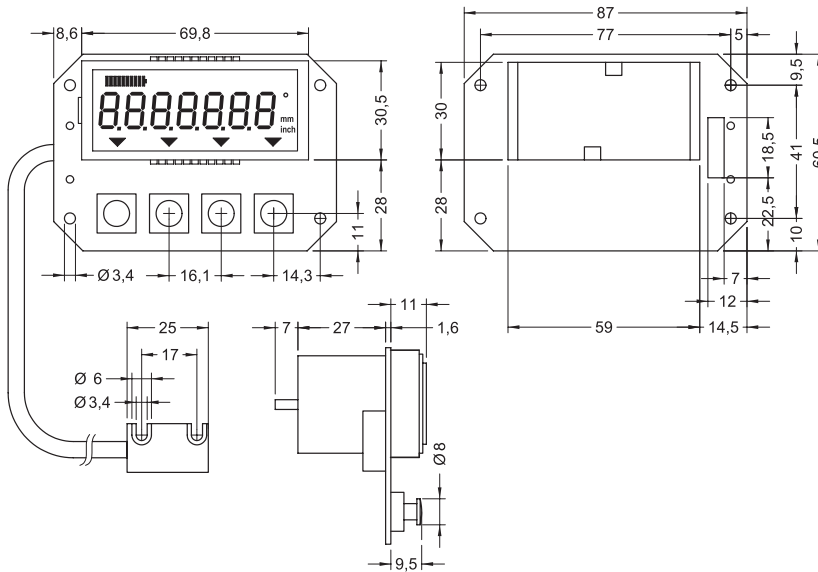

LD141

- Quasi-absolute battery powered display
- Ultracompact OEM version
- Connected sensor
- Mm-inch-degree mode
- RS232 interface
- Resolution up to 0.001 mm

PARAMETERS

3 Offset values, preset, resolution, mm/inch, angular display mode

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range: 0°C ÷ +50°C (+32°F +122°F)
 Storage temperature range: -20°C ÷ +80°C (-4°F +176°F)
 Protection: IP00

MECHANICAL SPECIFICATIONS

Dimensions: 87 x 61 x 43 mm
 Cable length: 5 m max.
 Display: LCD, 14 mm (-999999 ÷ 999999)

ELECTRICAL SPECIFICATIONS

Power supply: 1,5 V battery
 Consumption: ~ 700 µA
 Measurement speed: < 5 m/s max.
 Interface: RS232 (optional)

ACCESSORIES

MT25: Magnetic tape

ORDERING CODE

