



- Single axis positioning unit
- 3000 program steps
- Easy and intuitive programming



PS611



www.lika.biz
 • Data-sheet
 • User manual

ENVIRONMENTAL SPECIFICATIONS


Operating temperature range:	0°C +50°C (32°F +122°F)
Storage temperature range:	-20°C +65°C (-4°F +149°F)
Protection:	IP53 front, IP20 back

MECHANICAL SPECIFICATIONS

Dimensions:	154 x 120 x 46 mm ³ (connectors included)
Cut out:	135 x 111 mm ²
Display:	LCD alphanumeric, 4 lines

ELECTRICAL SPECIFICATIONS

Power supply:	+24Vdc ± 10%
Consumption:	7,2 W
Counting frequency:	15 kHz
Encoder input:	24V, AB, 15 kHz max.
Inputs:	8 digital inputs, 500 Hz max.
Outputs:	8 digital outputs, 24V, 750 mA max.
Service interface:	RS232

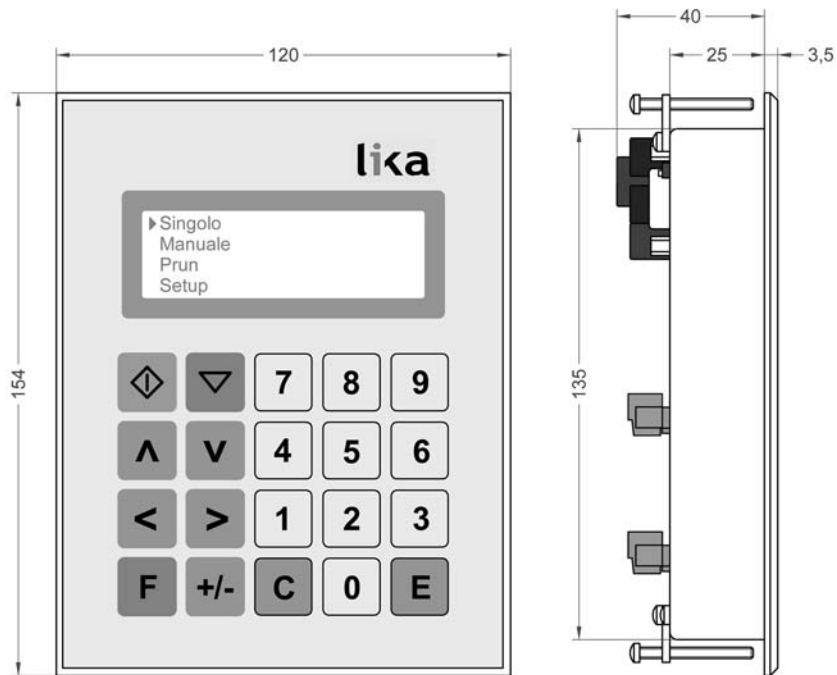

PS611

ORDERING CODE

