

# POSICONTROL

Communication terminal for positioning units

lika

series

TE601



- RDxx communication terminal for positioning units with CAN interfaces
- 3000 program steps



TE601



[www.lika.biz](http://www.lika.biz)  
• Data-sheet  
• User manual

## ENVIRONMENTAL SPECIFICATIONS


Operating temperature range:	0°C +50°C (32°F +122°F)
Storage temperature range:	-20°C +65°C (-4°F +149°F)
Protection:	IP53 front, IP20 back

## MECHANICAL SPECIFICATIONS

Dimensions:	154 x 120 x 46 mm <sup>3</sup> (connectors included)
Cut out:	135 x 111 mm <sup>2</sup>
Display:	LCD alphanumeric, 4 lines

## ELECTRICAL SPECIFICATIONS

Power supply:	+24Vdc ± 10%
Consumption:	7,2 W
Input signals:	10 digital inputs, 500 Hz max.
Interface:	RS232
Service interface:	CAN (6 slaves max.)

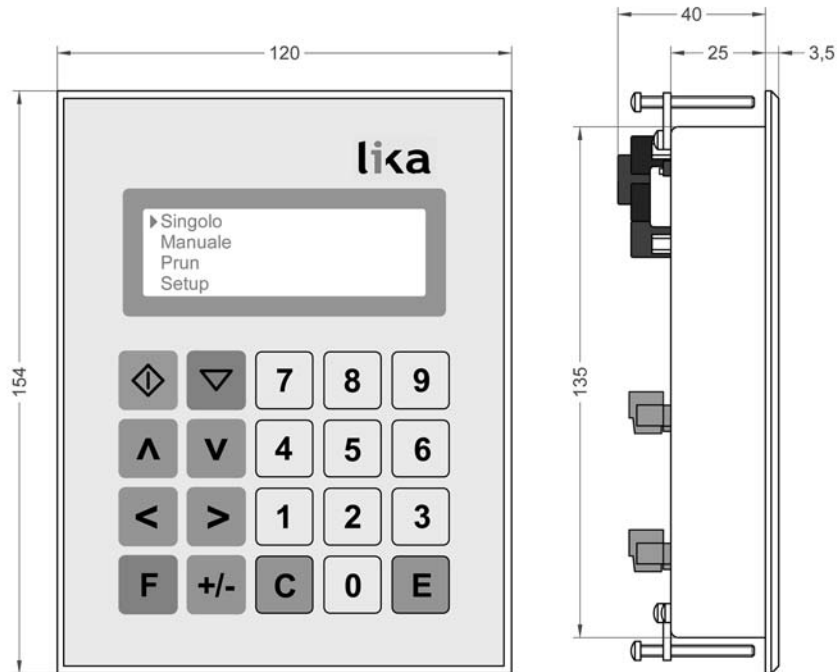

TE601

ORDERING CODE

